




Corduroy Hazard Warning Tactile Paving Surface

Corduroy Hazard Warning Tactile Paving Surfaces are to warn visually impaired pedestrians of the presence of specific hazards. These include steps, level crossings or the approach to on-street LRT platforms. It conveys the message 'hazard, proceed with caution'.

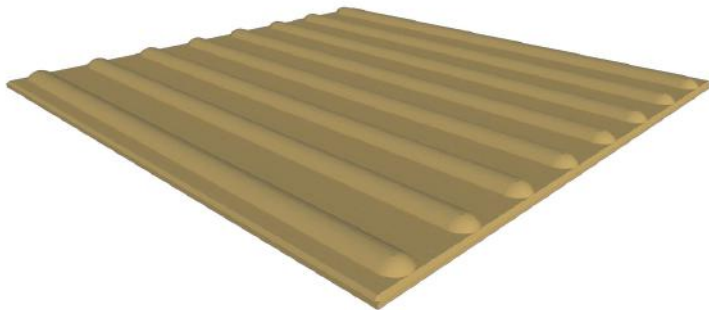


Benefits Include:

- Quick to install
- Easy to install
- Cost Effective
- Conforms to Department of Transport Guidelines

Testing:

- Assessment for the Determination of Wear Resistance, SATRA Technology Centre.
- Cleanability Assessment of Surface Mounted Tactile Paving System.
- Evaluation of Slip Resistance to SATRA TM144, SATRA Technology Centre.
- Laboratory Adhesive Bond Strength Testing, Building Investigation and Testing.
- UV tested for colourfast properties.
- Freeze / Thaw tested.
- TM144 Compliant.
- Skid Resistance Value – All profiles were tested using the pendulum test and values of up to 75 SRV were achieved.


Specification:

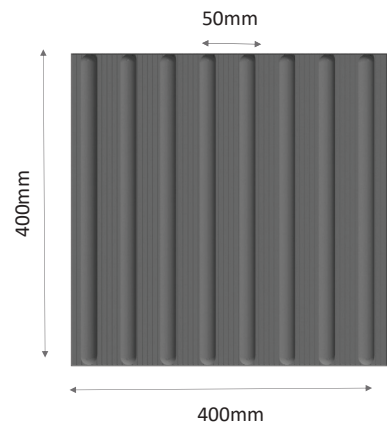

The bars are 6mm (± 0.5 mm) high, 20mm wide and spaced 50mm from the centre of one bar to the centre of the next. 5mm thickness.

Colours:

Available in Buff & Charcoal. We can also manufacture to any given RAL colour if required



Size:

- 400mm x 400mm

Quantity:

- All tiles are sold in boxes of 10.

Applications:

- The accent / decent area of the steps
- The foot of a ramp to an on-street light rapid transit (LRT) platform.
- A pedestrian crossing.
- Heavy rail platforms.
- Underground Platforms.
- Off-street light rapid transit platforms.